

**Withwave's Power Divider** offer frequency range from 1 to 2 GHz and low insertion loss & VSWR. This divider (PD1020-2-SF) is capable of handing power up to 20 Watts.


### ■ Features

- 2 Way Type
- SMA Connector (Female)
- Power Handling : 20 Watt

### ■ Specification

Scope	Specification	PD1020-2-SF
Electrical	Impedance	50 Ohm
	Freq. range	1 to 2 GHz
	Insertion Loss	<0.35 dB
	Isolation	>22 dB
	VSWR	<1.25 (In) < 1.15 (Out)
	Power Handling	20 W (Forward) 3 W (Reverse)
Mechanical & Environmental	Port Connector	SMA (Female)
	Operation Temperature	-25 °C to +65 °C

### ■ Drawing

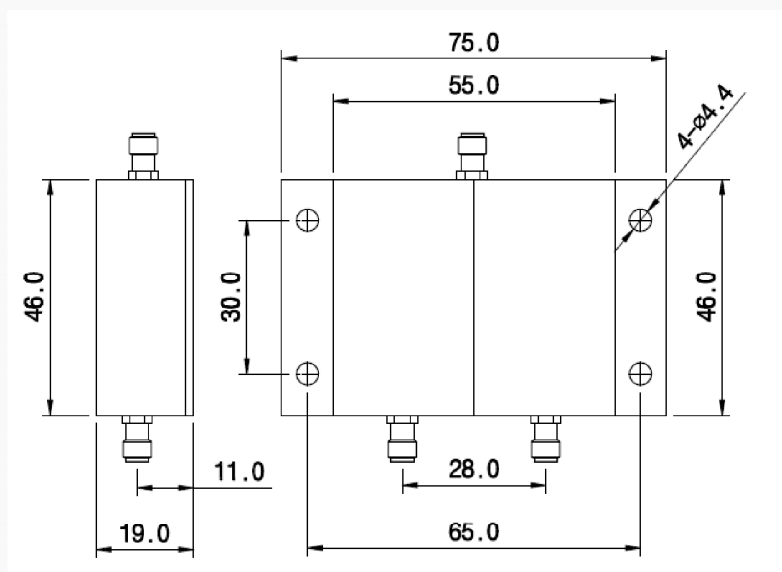

Unit : mm