

Withwave's Power Divider offer frequency range from 6 to 18 GHz and low insertion loss & VSWR.

This divider (PD60180-3-SF) is capable of handing C.W power up to 20 Watt (Max.)

■ Features


- 3 Way Type
- SMA Connector (Female)
- CW Power : 20 Watt (Max.)



■ Specification

Scope	Specification	PD60180-3-SF
Electrical	Impedance	50 Ohm
	Freq. range	6 to 18 GHz
	Insertion Loss	1.2 dB
	Isolation	18 dB (min.)
	VSWR	1.50 : 1
	Phase Bal.	± 6 dB
	Amplitude Bal.	± 0.5 dB
	CW Power	20 W (Max.)
	Peak Power	3 KW (Max.)
Mechanical	Port Connector	SMA (Female)
	Weight	75 g

■ Drawing

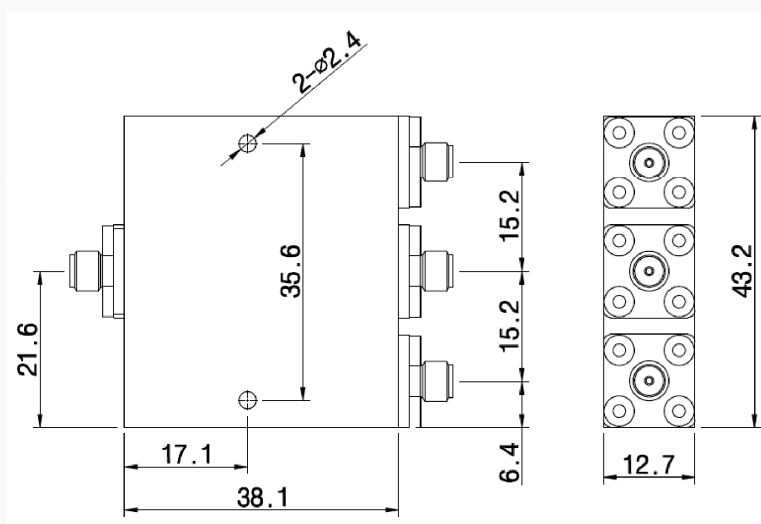

Unit : mm