Termination

2 Watt DC to 40 GHz



Withwave's terminations are composed of broadband, due to the coaxial construction, It offers a excellent performance specified from DC to 40 GHz Precision 2.92 mm coaxial connector interfaces ensure an good impedance match across wide bandwidth.

Features

- DC to 40 GHz


- Power rating: 2 Watts



Specification

Scope	Specification	TM03-02-05A
Electrical	Impedance(Ohm)	50
	Freq. range (GHz)	DC to 40 GHz
	VSWR	1.35
	Power rating	2 Watts
Material	Center Contact	BeCu with gold plated
	Body & Connector	Brass with gold plated

Drawing

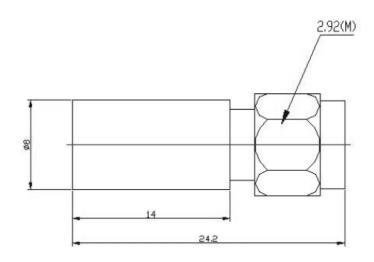

2 Watt DC to 40 GHz



Test Result

